

# 角ピンプラグ 1.0x1.0mm Header Plug


[Specifications]

Maximum current : 1.0A  
 Dielectric strength : AC300Vrms  
 Insulation resistance : 1000MΩ min  
 Contact resistance : 20mΩ max  
 Temperature range : -40°C~+125°C

[Materials]

Plug Pin : Phosphor Bronze  
 Gold flash over Ni plating  
 Insulator : Polyester UL94V-0

Max processing temperature  
 230°C for 60second, 260°C for 10second


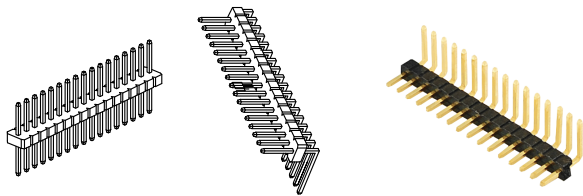


IPB10 - ST - □□


ST : Single in line, Straight  
 SR : Single in line, Right Angle  
 Number of positions : P  
 Single in line : 4~50

注<sup>2</sup>



ST : Single in line, Straight

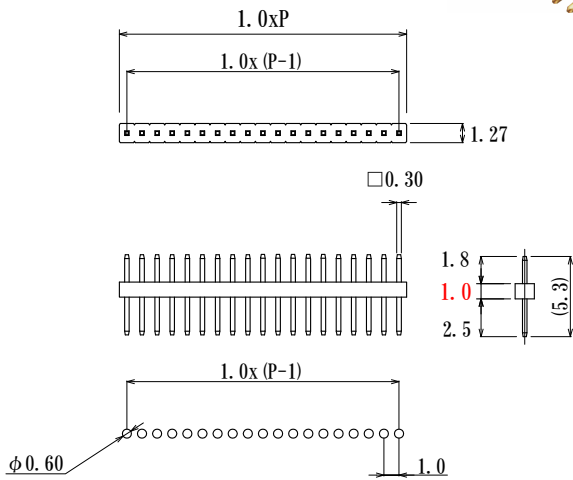

SR : Single in line, Right Angle

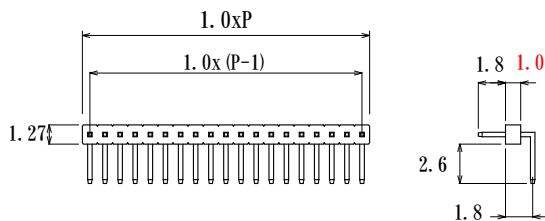

PC board layout

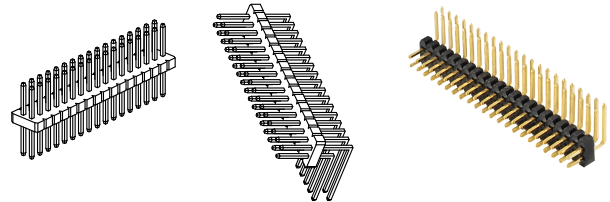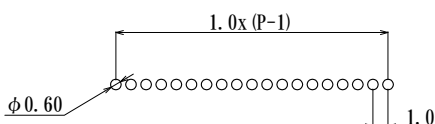


IPB10 - DT - □□


DT : Dual in line, Straight  
 DR : Dual in line, Right Angle  
 Number of positions : P  
 Dual in line : 6~100  
 (2x3~2x50)

注<sup>2</sup>


DT : Dual in line, Straight

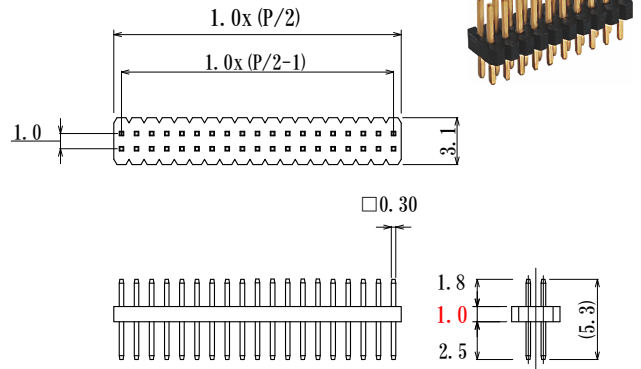

DR : Dual in line, Right Angle

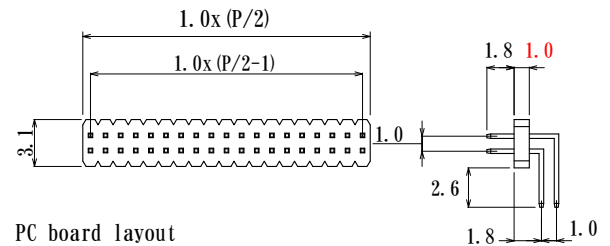

PC board layout

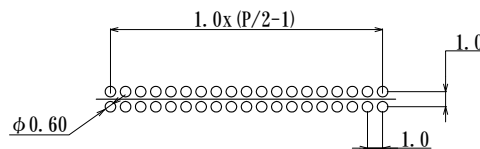

注<sup>2</sup> 環境負荷物質調査書をご用意できない場合がございます。詳しくは、弊社営業へお問い合わせください。

# 角ピンソケット 1.0x1.0mm Header Socket



[Specifications]

Maximum current : 1.0A  
 Dielectric strength : AC300Vrms  
 Insulation resistance : 1000MΩ min  
 Contact resistance : 20mΩ max  
 Temperature range : -40°C~+125°C

[Materials]

Plug Pin : Phosphor Bronze  
 Gold flash over Ni plating  
 Insulator : Polyester UL94V-0



Max processing temperature  
 230°C for 60second, 260°C for 10second




HSB10D - ST - □□

ST : Single in line



Number of positions : P  
 Single in line : 4~50

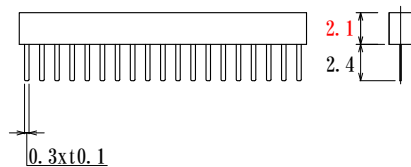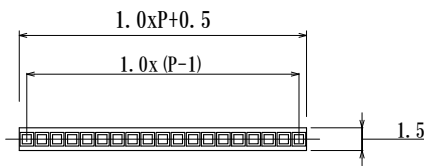

PC board layout

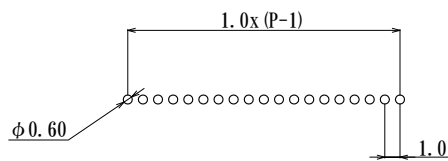



注<sup>2</sup>




HSB10D - DT - □□

DT : Dual in line

Number of positions : P  
 Single in line : 4~50  
 Dual in line : 6~100  
 (2x3~2x50)

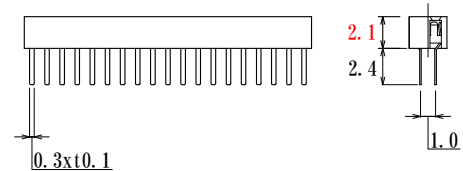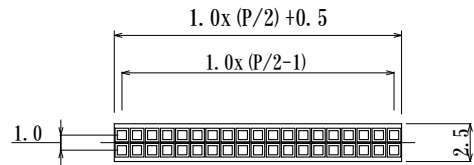

PC board layout


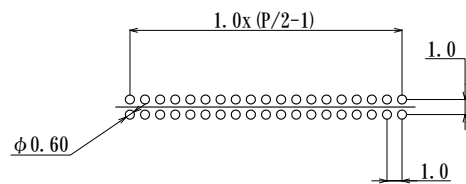


注<sup>2</sup>

表面実装タイプ  
 も揃えています



かん合時の  
 基板間高さ



\*ソケットに挿入するプラグピン長さは  
 1.8mm~2.1mmです

注<sup>2</sup> 環境負荷物質調査書をご用意できない場合がございます。詳しくは、弊社営業へお問い合わせください。