

Header Plug 1.0x1.0mm


[Specifications]

Maximum current : 1.0A
Dielectric strength : AC300Vrms
Insulation resistance : 1000MΩ min
Contact resistance : 20mΩ max
Temperature range : -40°C~+125°C

[Materials]

Plug Pin : Phosphor Bronze
Gold flash over Ni plating
Insulator : Polyester UL94V-0

Max processing temperature
230°C for 60second, 260°C for 10second


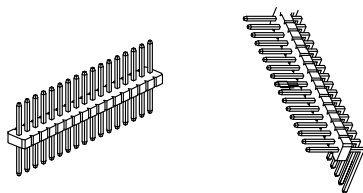


IPB10 - ST - □□


ST : Single in line, Straight
SR : Single in line, Right Angle
Number of positions : P
Single in line : 4~50

Note²



ST : Single in line, Straight

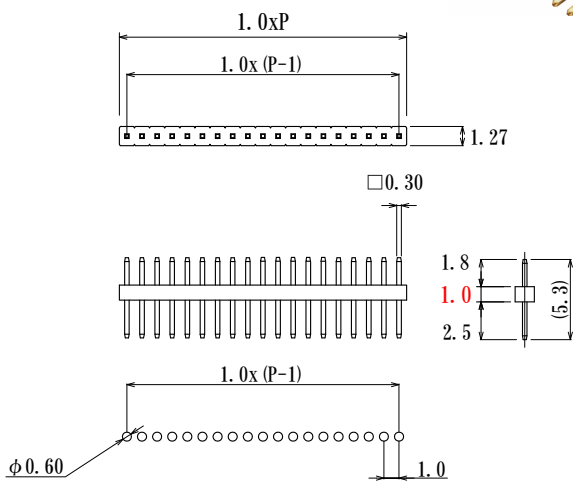

SR : Single in line, Right Angle

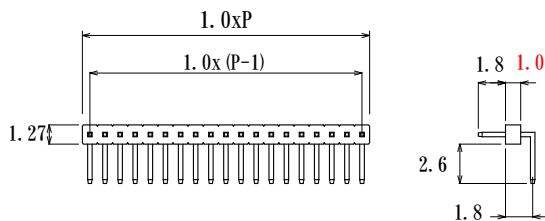

PC board layout

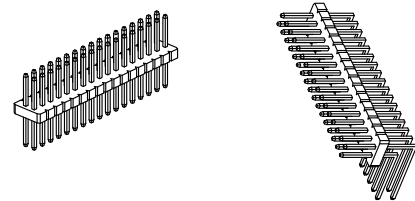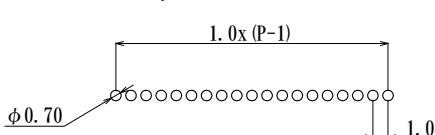


IPB10 - DT - □□


DT : Dual in line, Straight
DR : Dual in line, Right Angle
Number of positions : P
Dual in line : 6~100
(2x3~2x50)

Note²


DT : Dual in line, Straight

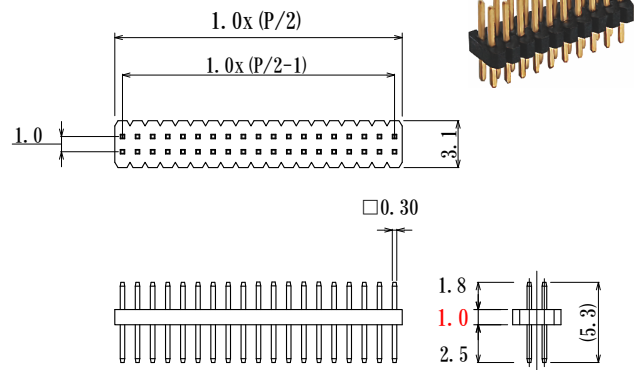

DR : Dual in line, Right Angle

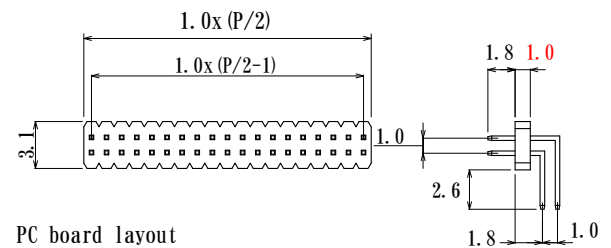

PC board layout

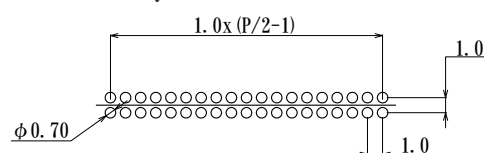

P : Number of position
Note²: Please note that survey of the substance of concern may not be provided. For details, please contact our sales staff.

角ピンソケット 1.0x1.0mm Header Socket



[Specifications]

Maximum current : 1.0A
 Dielectric strength : AC300Vrms
 Insulation resistance : 1000MΩ min
 Contact resistance : 20mΩ max
 Temperature range : -40°C~+125°C

[Materials]

Plug Pin : Phosphor Bronze
 Gold flash over Ni plating
 Insulator : Polyester UL94V-0



Max processing temperature
 230°C for 60second, 260°C for 10second




HSB10D - ST - □□

ST : Single in line



Number of positions : P
 Single in line : 4~50

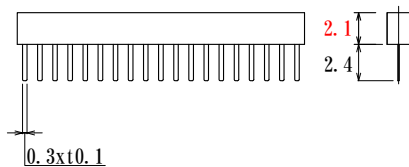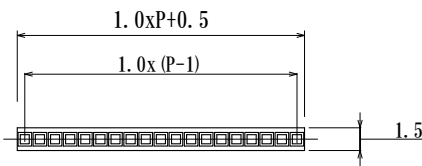

PC board layout

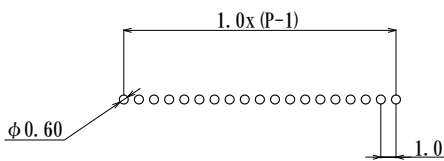



注²




HSB10D - DT - □□

DT : Dual in line

Number of positions : P
 Single in line : 4~50
 Dual in line : 6~100
 (2x3~2x50)

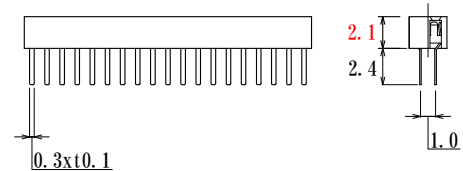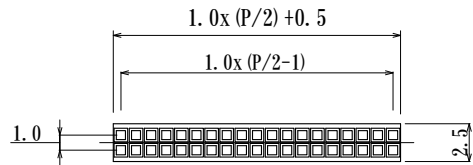

PC board layout


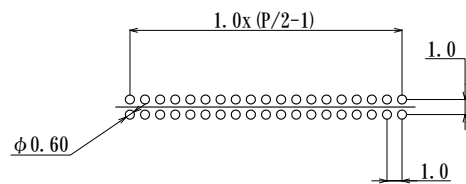


注²

表面実装タイプ
 も揃えています



かん合時の
 基板間高さ



*ソケットに挿入するプラグピン長さは
 1.8mm~2.1mmです

注² 環境負荷物質調査書をご用意できない場合がございます。詳しくは、弊社営業へお問い合わせください。