



Single ended probe pin 片端プローブピン
 Outer Dia. $\phi 0.34 \sim \phi 0.68\text{mm} / \phi 0.0133 \sim \phi 0.0267''$

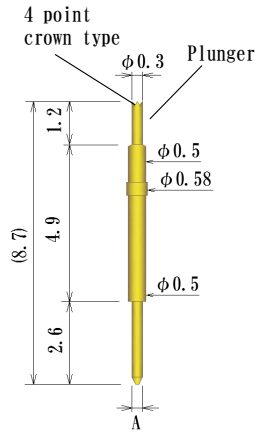


Part No.	A	Recommended travel	Full travel	Current rating	Plunger head style	Remarks
8YF58L87	$\phi 0.3$	0.22N (22.4gf) at 0.5mm travel	1.2mm	0.7A	4 point crown type	-
8YF58L87-SUS-CRB						注1)
8YF58L87-SUS-CRB-A	$\phi 0.26$					

注1) High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$

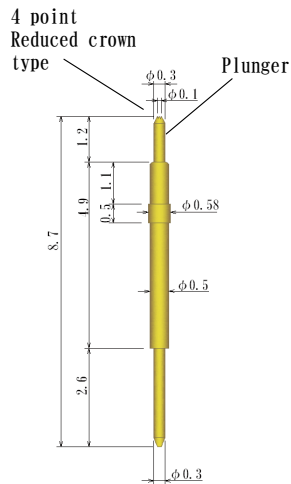


Preload 0.049N (5gf)
 0.22N (22gf) at 0.5mm travel
 Current max 0.7A

8YF58L87-TPCRN

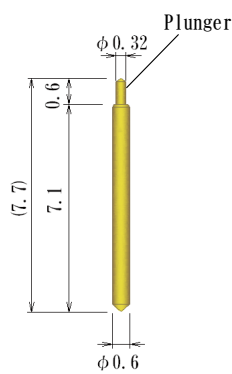

0.3N (30.6gf) at 0.3mm travel
 Full travel 0.5mm
 Current max 0.7A


8YJ-F60L77

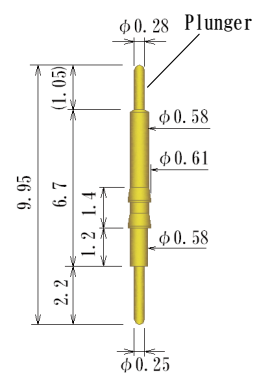



Preload 0.078N (8gf)
 0.20N (20.4gf) at 0.4mm travel
 Full travel 1.05mm
 Current max 0.7A

8YF-K58L995G

Single ended probe pin 片端プローブピン
 Outer Dia. $\phi 0.34 \sim \phi 0.68\text{mm} / \phi 0.0133 \sim \phi 0.0267''$

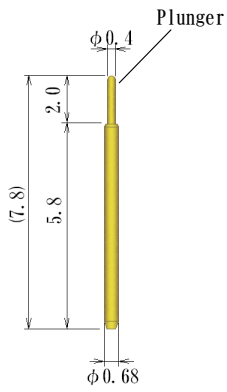

Acceptable Socket

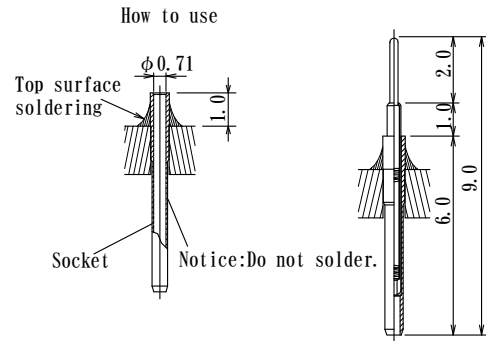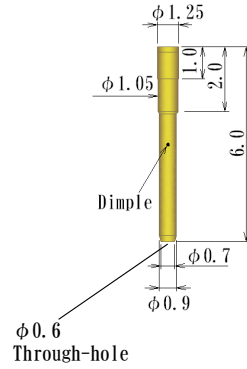






Preload 4.0gf (0.039N)
 0.09N (10gf) at 1.3mm travel
 Full travel 2.0mm
 Current max 0.5A

Brass, Au plating
 PCB Through-hole Dia : $\phi 1.15$

8YD06878L-SIN-CONR2

8YF68L78-SOK-SIN-S

Single ended probe pin 片端プローブピン
 Outer Dia. $\phi 0.34 \sim \phi 0.68\text{mm} / \phi 0.0133 \sim \phi 0.0267''$
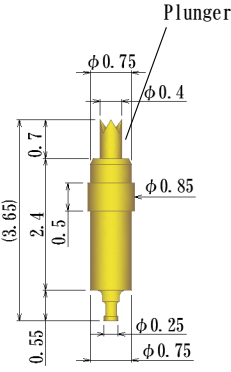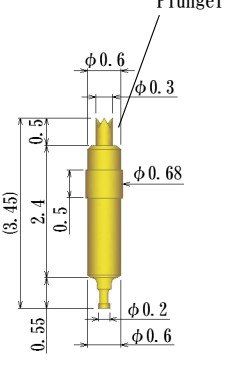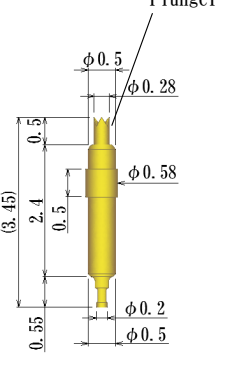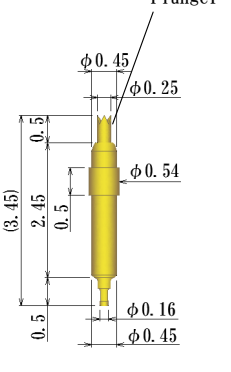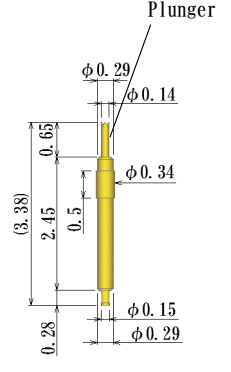
<p>表面実装用 SMT Type</p>  <p>Plunger</p> <p>$\phi 0.75$ $\phi 0.4$ 0.7 2.4 0.55 $\phi 0.85$ $\phi 0.25$ $\phi 0.75$</p> <p>0.147N (15gf) at 0.5mm travel Full travel 0.7mm Current max 1.0A</p> <p>8YF075L365-DA</p>	<p>表面実装用 SMT Type</p>  <p>Plunger</p> <p>$\phi 0.6$ $\phi 0.3$ 0.5 2.4 0.55 $\phi 0.68$ $\phi 0.2$ $\phi 0.6$</p> <p>0.151N (15.4gf) at 0.35mm travel Full travel 0.5mm Current max 0.7A</p> <p>8YF068L345-DIR</p>	<p>表面実装用 SMT Type</p>  <p>Plunger</p> <p>$\phi 0.5$ $\phi 0.28$ 0.5 2.4 0.55 $\phi 0.58$ $\phi 0.2$ $\phi 0.5$</p> <p>0.148N (15.1gf) at 0.35mm travel Full travel 0.5mm Current max 0.7A</p> <p>8YF058L345-CAN</p>	<p>表面実装用 SMT Type</p>  <p>Plunger</p> <p>$\phi 0.45$ $\phi 0.25$ 0.5 2.45 0.5 $\phi 0.54$ $\phi 0.16$ $\phi 0.45$</p> <p>0.146N (14.9gf) at 0.35mm travel Full travel 0.5mm Current max 0.5A</p> <p>8YF054L345-CAN</p>
<p>表面実装用 SMT Type</p>  <p>Plunger</p> <p>$\phi 0.29$ $\phi 0.14$ 0.65 2.45 0.28 $\phi 0.34$ $\phi 0.15$ $\phi 0.29$</p> <p>0.147N (15gf) at 0.4mm travel Full travel 0.5mm Current max 0.5A</p> <p>8YF034L328-DAT</p>			