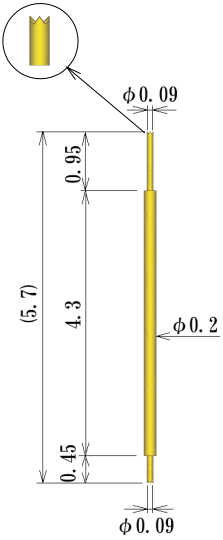
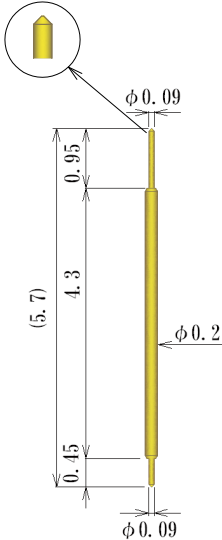
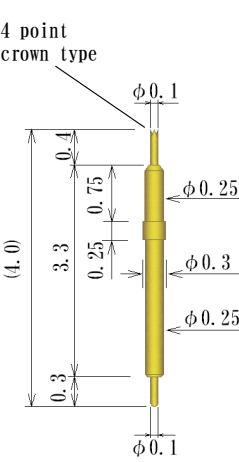
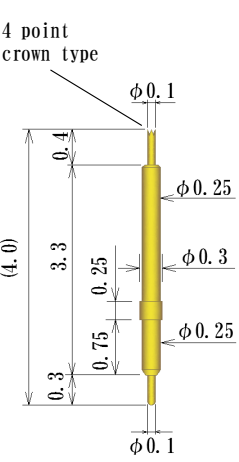
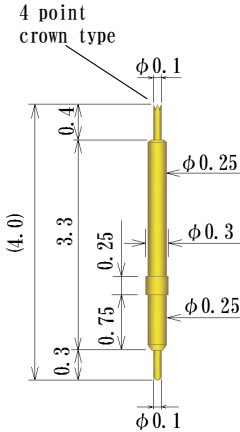
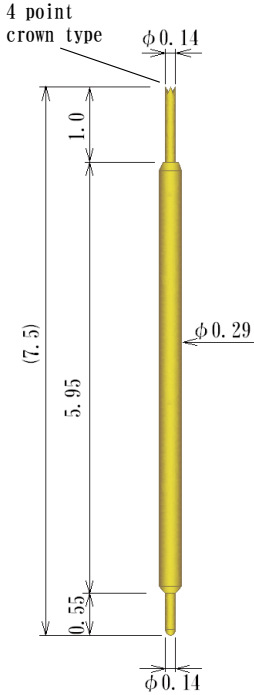
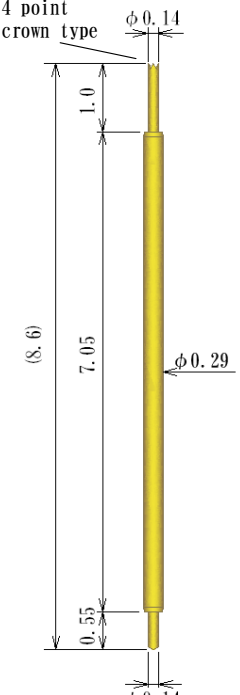
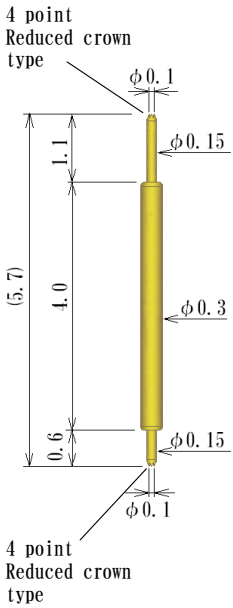
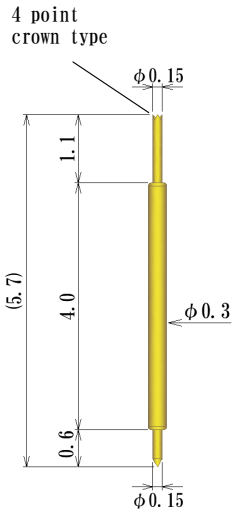
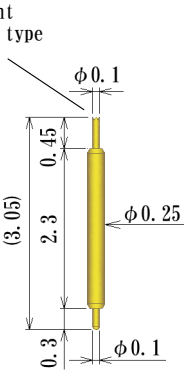


Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.30\text{mm}/\phi 0.0118''$ or smaller

 <p>Preload 0.049N (4.99gf) 0.196N (20gf) at 0.6mm travel Full travel 0.7mm Current rating 0.1A</p> <p>88Y-D20H-L57-CRN</p>	 <p>Preload 0.049N (4.99gf) 0.196N (20gf) at 0.6mm travel Full travel 0.7mm Current rating 0.1A</p> <p>88Y-D20H-L57-CON</p>	 <p>0.245N (25gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I</p>	 <p>0.245N (25gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I-RV</p>
<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>0.226N (23gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I-SUS</p>	 <p>0.196N (20gf) at 0.9mm travel Full travel 1.2mm Current rating 0.3A</p> <p>8YK-D29H-L75-SI</p>	 <p>Preload 0.032N (3.3gf) 0.196N (20gf) at 0.9mm travel Full travel 1.2mm Current rating 0.3A</p> <p>8YK-D29H-L86-S60</p>	

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.30\text{mm}/\phi 0.0118''$ or smaller

 <p>4 point Reduced crown type</p> <p>$\phi 0.1$</p> <p>$\phi 0.15$</p> <p>1.1</p> <p>4.0</p> <p>$\phi 0.3$</p> <p>0.6</p> <p>$\phi 0.15$</p> <p>$\phi 0.1$</p> <p>4 point Reduced crown type</p> <p>0.245N (25gf) at 0.6mm travel Full travel 1.0mm Current rating 0.3A</p> <p>8YK-D30H-L57-TPC-K</p>	 <p>4 point crown type</p> <p>$\phi 0.15$</p> <p>1.1</p> <p>4.0</p> <p>$\phi 0.3$</p> <p>0.6</p> <p>$\phi 0.15$</p> <p>0.25N (25.4gf) at 0.65mm travel Full travel 1.0mm Current rating 0.3A</p> <p>8YK-D30H-L57-CRCN-K</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>4 point crown type</p> <p>$\phi 0.1$</p> <p>0.45</p> <p>2.3</p> <p>$\phi 0.25$</p> <p>0.3</p> <p>$\phi 0.1$</p> <p>0.137N (13.97gf) at 0.5mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YK-D25H-L30CR-SUS</p>	