



N Series Socket Pins


Contact Resistance: less than 15mΩ
 Acceptable Plug Range: $\phi 0.52 \sim \phi 0.30$
 Material Sleeve: Brass Gold over Ni plated, or Tin over Ni plated
 Contact: Beryllium Copper, Gold over Ni plated



NSF18-GG




NSF20-GG




Acceptable Plug: $\phi 0.40\text{max}$


NSF19-GG




RN0013-GG

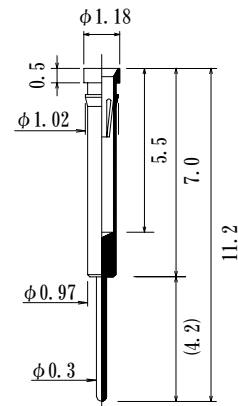


NA10-GG




NZP19-GG




NZP28-GG

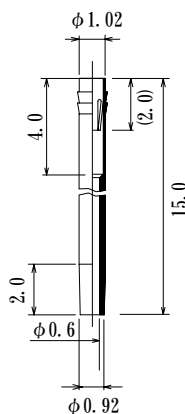

NZP10-GG

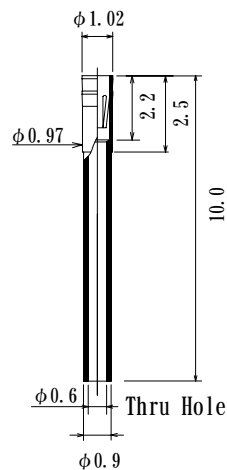


NZP100-GG

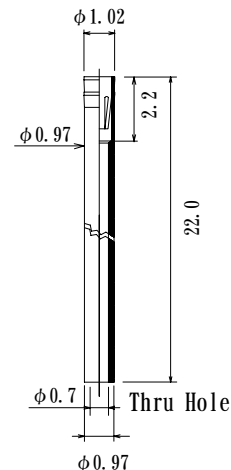


NZP220-GG

NY Series Socket pins


Contact Resistance: less than 15mΩ
 Acceptable Plug Range: $\phi 0.30 \sim \phi 0.40\text{mm}$
 Material Sleeve: Brass Gold over Ni plated, or Tin over Ni plated
 Contact: Beryllium Copper, Gold over Ni plated



NY42-GG
Low Force



NY42H0-GG
Low Force



NZM10-GG
Low Force