



φ 0.35~φ 0.21mm Plug, Socket Pins


Contact Resistance: less than 30mΩ at 0.30mm dia. plug
 Acceptable Plug Range: φ 0.35~φ 0.21mm
 Material Sleeve: Bronze Gold over Ni plated
 Contact: Beryllium-Copper Gold over Ni plated
 (NV6contact)




NV6807-GG

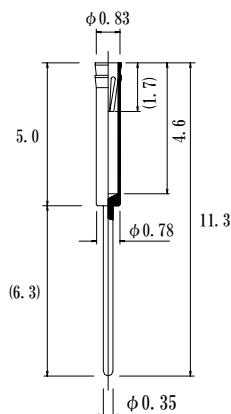

NV6815-GG

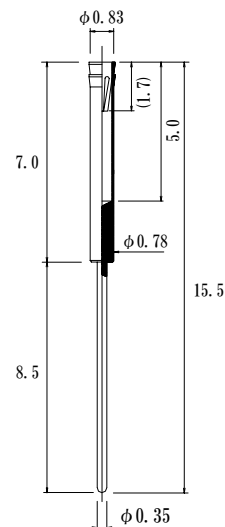


NV6816-GG




NV6XL385-GG

NV6R Socket Pins

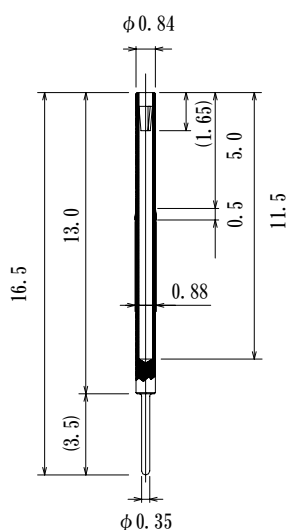

NV6R130L165-GG

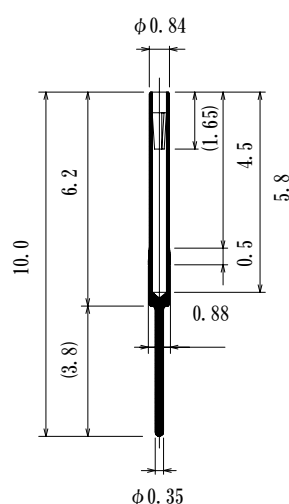

NV6R62L100-GG

Note:

The Pins are reference only, not for sales.
 Special technique is required to handle these Ultra small Socket Pins.
 Our experienced engineers, to best suit your specifications, will design
 and assemble your connectors.

このページ記載品は販売対象ではありません。
 これらのソケットピンは、小型のため絶縁材への組込方法に特殊性があります。
 そこで、当社では、貴社仕様をいただき、これらのソケットピンを組込んだコネクタをお作りします。