



φ0.29~φ0.18mm plug, Socket Pins

Contact Resistance: less than 30mΩ at 0.25mm plug
Acceptable Plug Range: φ0.29~φ0.18mm
Material Sleeve: Bronze Gold over Ni plated
Contact: Beryllium-Copper Gold over Ni plated
(NV5contact)

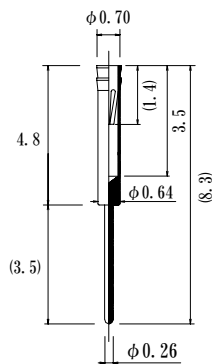


NV5983-GG

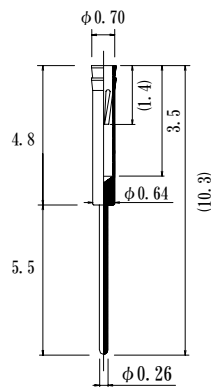

NV5910-GG

Application
Mother Board 0.8mm pitch



Note:

The Pins are reference only, not for sales.
Special technique is required to handle these Ultra small Socket Pins.
Our experienced engineers, to best suit your specifications, will design and assemble your connectors.

このページ記載品は販売対象ではありません。

これらのソケットピンは、小型のため絶縁材への組込方法に特殊性があります。

そこで、当社では、貴社仕様をいただき、これらのソケットピンを組込んだコネクタをお作りします。