



φ 0.54~φ 0.30mm plug, Socket Pins


Contact Resistance: less than 15mΩ at 0.45mm dia. plug
 Acceptable Plug Range: φ 0.54~φ 0.30mm
 Material Sleeve: Brass Gold over Ni plated
 Contact: Beryllium-Copper Gold over Ni plated
 (NZKcontact)

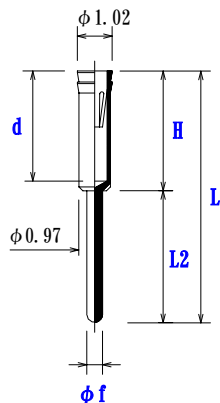

Parts Number	Height H	Length L2	Depth d	Length L	mm φ f
NZK0010-GG	3.8	4.2	3.4	8.0	0.51
NZK0011-GG	5.5	4.2	5.1	9.7	
NZK0014-GG	3.8	6.8	3.4	10.6	
NZK0016-GG	4.5	4.2	4.0	8.7	
NZK0018-GG	5.6	5.0	5.2	10.6	
NZK0019-GG	7.2	3.4	6.8	10.6	
NZK0027-GG	11.0	5.7	5.0	16.7	0.4
NZK0028-GG	3.8	18.0	3.4	21.8	0.51
NZK0029-GG	3.1	5.2	2.7	8.3	
NZK0033-GG	3.8	8.76	3.4	12.56	
NZK0040-GG	8.0	8.0	5.0	16.0	

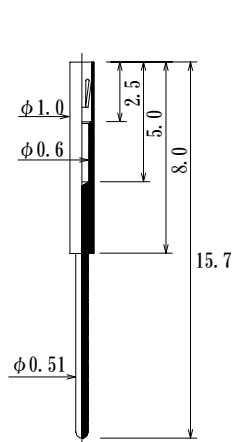

[NZBL-0010-GG](#)

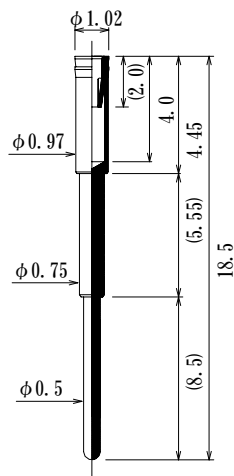

[NC0045-185T-G](#)

Application

