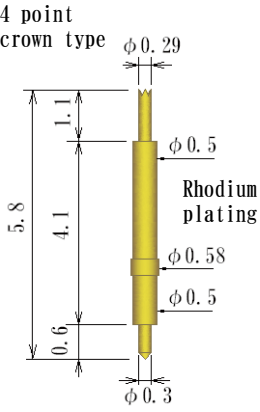
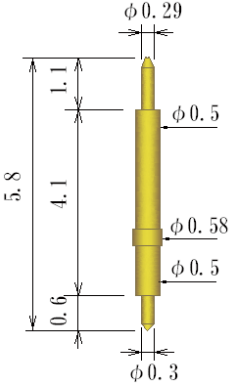
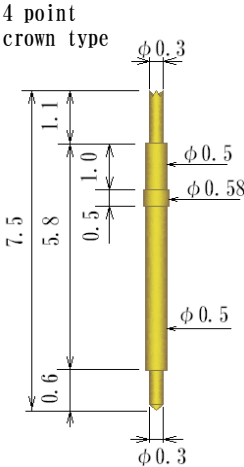
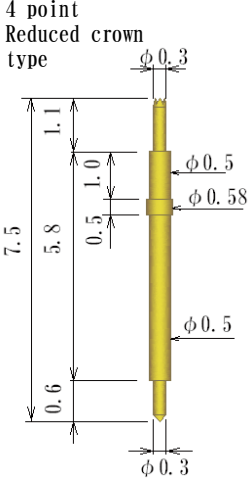
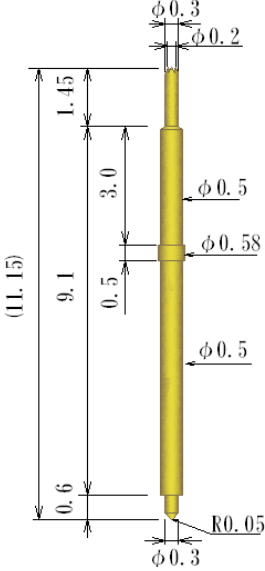
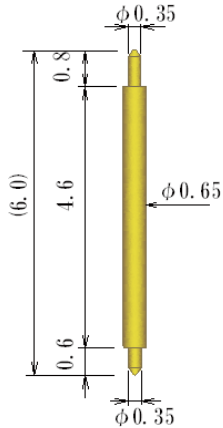
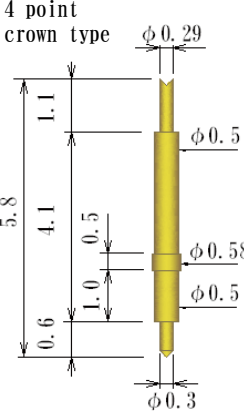
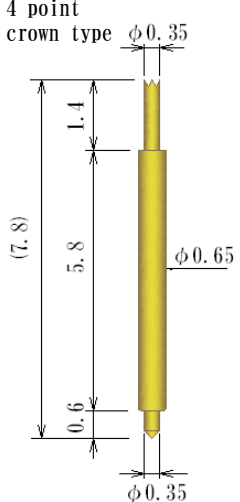









Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.50 \sim 0.69\text{mm} / \phi 0.0197'' \sim \phi 0.027''$

Nihon Connect
 TEL 03 (5706) 4360
 FAX 03 (5706) 4363

 <p>4 point crown type Rhodium plating</p> <p>Preload 0.02N (2gf) Full travel 1.3mm 0.26N (26gf) at 0.9mm travel Current rating 0.5A</p> <p>8YF58L58G-RHI</p>	 <p>Preload 0.02N (2gf) 0.29N (30gf) at 0.9mm travel Current rating 0.5A</p> <p>8Y-F58L58-TPCRN</p>	 <p>4 point crown type</p> <p>Preload 0.06N (6gf) Full travel 1.3mm 0.29N (30gf) at 0.9mm travel Current rating 0.5A</p> <p>8YF58L75I</p>	 <p>4 point Reduced crown type</p> <p>Preload 0.06N (6gf) Full travel 1.3mm 0.29N (30gf) at 0.9mm travel Current rating 0.5A</p> <p>8YF58L75-2I</p>
 <p>Full travel 1.3mm 0.274N (28gf) at 0.8mm travel Current rating 0.5A</p> <p>8YF58L1115-28G</p>	 <p>Full travel 1.1mm Preload 0.06N (6gf) 0.29N (30gf) at 0.8mm travel Current rating 0.7A</p> <p>8YF065L60I</p>	 <p>4 point crown type</p> <p>Preload 0.02N (2gf) 0.29N (30gf) at 0.9mm travel Current rating 0.5A</p> <p>8Y-F58L58G</p>	 <p>4 point crown type</p> <p>Preload 0.06N (6gf) Full travel 1.3mm 0.29N (30gf) at 0.9mm travel Current rating 0.7A</p> <p>8YF065L78-GI</p>

Double ended probepin 両端プローブピン
Outer Dia. $\phi 0.50 \sim 0.69\text{mm} / \phi 0.0197'' \sim \phi 0.027''$

Nihon Connect
TEL 03 (5706) 4360
FAX 03 (5706) 4363

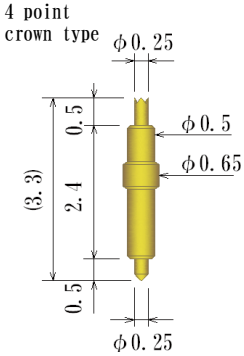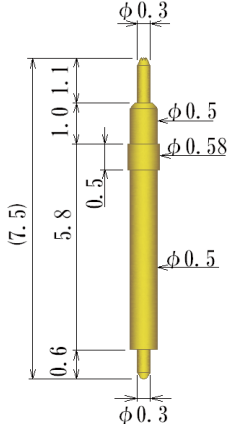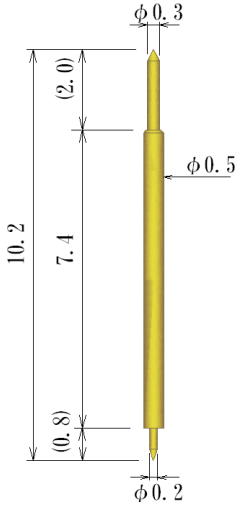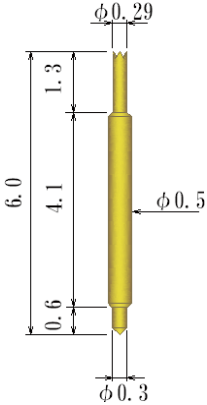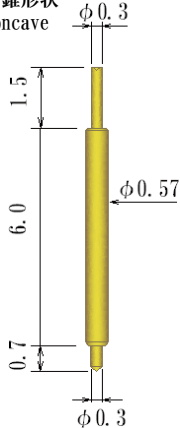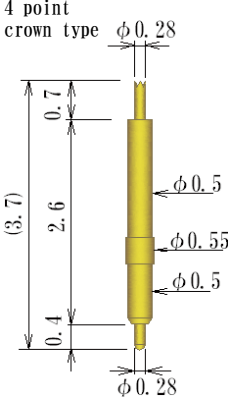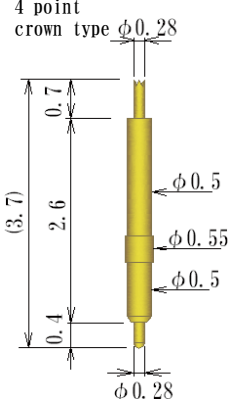 <p>4 point crown type</p> <p>Full travel 0.9mm 0.1N (10gf) at 0.9mm travel Current rating 0.5A</p> <p>8YF65L33-CRCNI</p>	<p>High Temperature spec</p>  <p>Full travel 1.1mm 0.294N (30gf) at 0.9mm travel Current rating 0.5A</p> <p>8YF58L75-2SUS</p>	 <p>Full travel 2.8mm 0.18N (18gf) at 1.8mm travel Current rating 0.5A</p> <p>8YF50L102-2</p>	
 <p>Full travel 1.3mm 0.294N (30gf) at 0.8mm travel Current rating 0.5A</p> <p>8YF58L60G-SA-S</p>	<p>円錐形状 Concave</p>  <p>Preload 0.07N (7gf) 0.22N (22gf) at 1.0mm travel Current rating 0.5A</p> <p>8YD57L82L-WG</p>	<p>4 point crown type</p>  <p>Full travel 0.65mm 0.27N (27.5gf) at 0.55mm travel Current rating 0.5A</p> <p>8YK-D50H-L37</p>	<p>4 point crown type</p>  <p>Full travel 0.65mm 0.295N (30.1gf) at 0.55mm travel Current rating 0.5A</p> <p>8YK-D50H-L37-30G</p>