


# SPRING PROBE, 8YS series

- [特徴] ・高耐久性  
 ・高い接触信頼性  
 ・狭ピッチ対応可
- ・High Durability  
 ・High Contact Reliability  
 ・Narrow Pitch type available



## 8YSN058 type

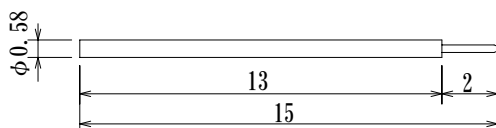


Preload ——— 0.15N (15gf)  
 2/3 travel ——— 0.44N (45gf)  
 Full travel ——— 0.64N (65gf)

<p><b>8YSN058-1</b></p>	<p><b>8YSN058-2</b></p>	<p><b>8YSN058-3</b></p>	<p><b>8YSN058-5F</b></p>
-------------------------	-------------------------	-------------------------	--------------------------

### Acceptable Sockets

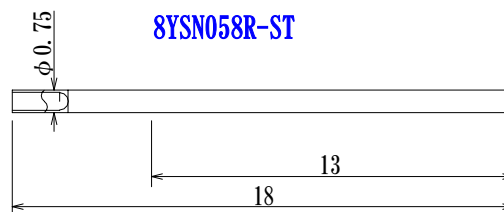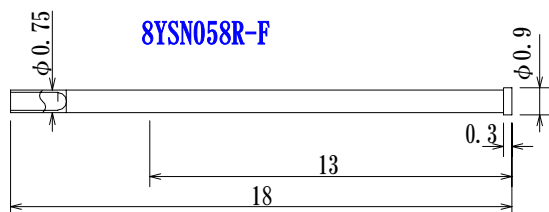



## 8YSF048 type

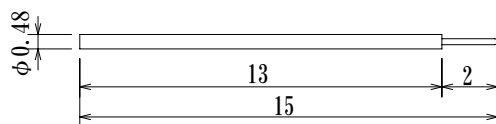


Preload ——— 0.20N (20gf)  
 2/3 travel ——— 0.44N (45gf)  
 Full travel ——— 0.59N (60gf)

<p><b>8YSF048-1</b></p>	<p><b>8YSF048-2</b></p>	<p><b>8YSF048-3</b></p>	<p><b>8YSF048-5F</b></p>
-------------------------	-------------------------	-------------------------	--------------------------

### Acceptable Sockets

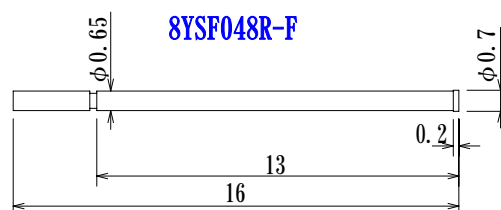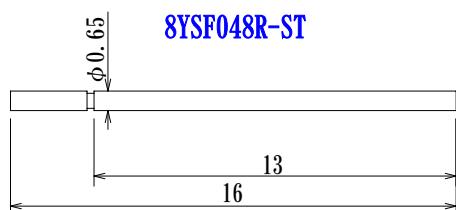



**8YSJ038 type**

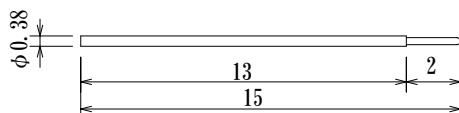


Preload ——— 0.20N (20gf)  
 2 / 3 travel — 0.44N (45gf)  
 Full travel — 0.64N (65gf)

<p><b>8YSJ038-1</b></p>	<p><b>8YSJ038-2</b></p>	<p><b>8YSJ038-3</b></p>	<p><b>8YSJ038-5F</b></p>
-------------------------	-------------------------	-------------------------	--------------------------

**Acceptable Sockets**

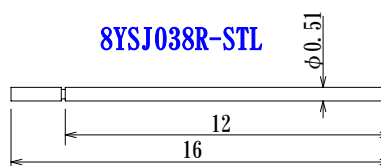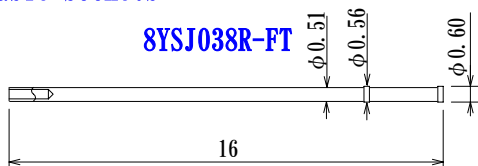



**8YSB031 type**

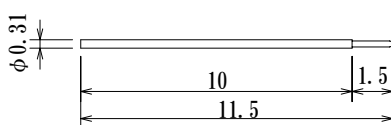


Preload ——— 0.15N (15gf)  
 2 / 3 travel — 0.30N (30gf)  
 Full travel — 0.45N (45gf)

<p><b>8YSB031-1</b></p>	<p><b>8YSB031-2</b></p>	<p><b>8YSB031-3</b></p>	<p><b>8YSB031-5F</b></p>
-------------------------	-------------------------	-------------------------	--------------------------

**Acceptable Sockets**

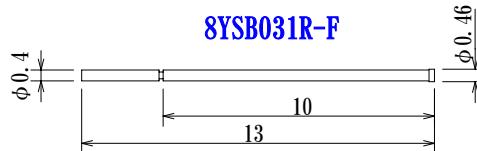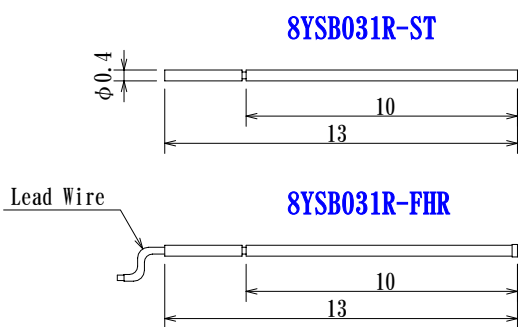

**8YSQ025 type**

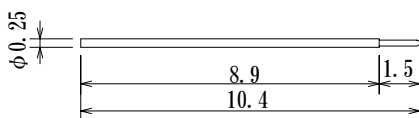

Preload ——— 0.10N (10gf)  
 2 / 3 travel — 0.20N (20gf)  
 Full travel — 0.34N (35gf)

<p><b>8YSQ025-1</b></p>	<p><b>8YSQ025-2</b></p>	<p><b>8YSQ025-3</b></p>
-------------------------	-------------------------	-------------------------

**Acceptable Sockets**

