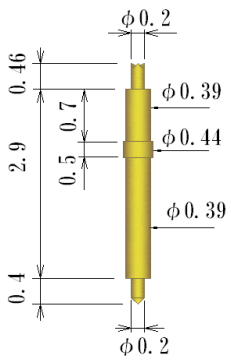
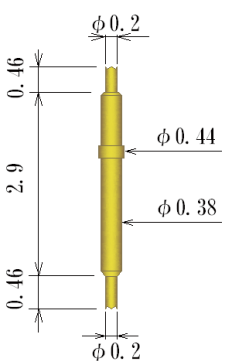
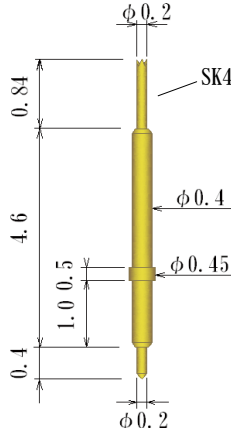
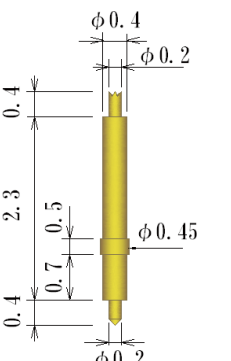
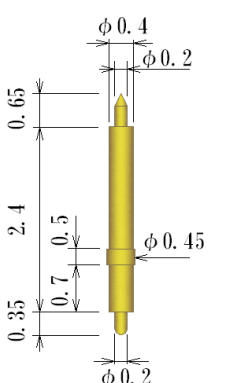
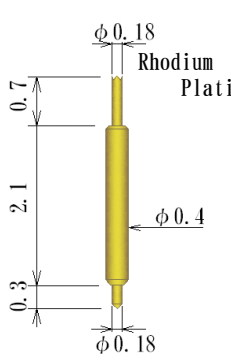


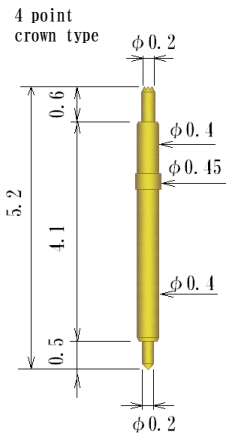
Double ended probepin 両端プローブピン
Outer Dia. $\phi 0.40 \sim 0.49\text{mm} / \phi 0.016'' \sim \phi 0.0193''$

Nihon Connect
TEL 03 (5706) 4360
FAX 03 (5706) 4363

<p>4 point crown type</p>  <p>Preload 0.07N (7gf) 0.25N (25gf) at 0.4mm travel Current Rating 0.5A</p> <p>8YK-D38H-L37</p>	<p>4 point crown type</p>  <p>Full travel 0.6mm 0.245N (25gf) at 0.45mm travel Current Rating 0.5A</p> <p>8YK-D38H-L37-CRNI</p>	<p>SK4材</p>  <p>Full travel 0.8mm 0.297N (30gf) at 0.64mm travel Current Rating 0.5A</p> <p>8YK-D39H-L584-I</p>	
<p>4 point crown type</p>  <p>Full travel 0.55mm 0.229N (23.4gf) at 0.4mm travel Current Rating 0.5A</p> <p>8YK-D40H-L30</p>	 <p>Full travel 0.6mm max 0.27N at 0.5mm travel Current Rating 0.5A</p> <p>8YK-D40H-L34I</p>	<p>4 point crown type</p>  <p>Rhodium Plating</p> <p>Full travel 0.6mm 0.21N (21gf) at 0.5mm travel Current Rating 0.5A</p> <p>8YF40L31-RHI</p>	

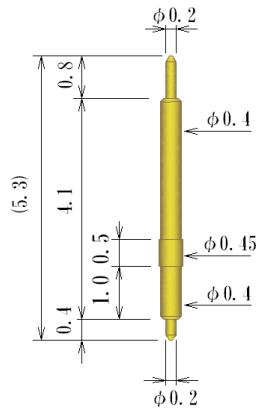
Double ended probepin 両端プローブピン
 Outer Dia. $\phi 0.40 \sim 0.49\text{mm} / \phi 0.016'' \sim \phi 0.0193''$

Nihon Connect
 TEL 03 (5706) 4360
 FAX 03 (5706) 4363



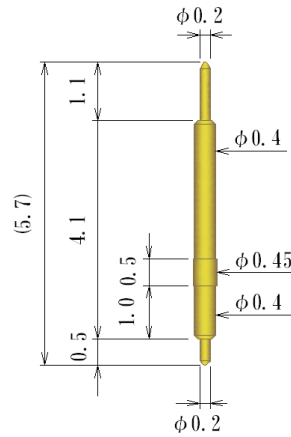
Full travel 0.9mm
 0.32N (32gf) at 0.7mm travel
 Current rating 0.5A

8YK-D40H-L52-TPCRNI



Full travel 0.6mm
 0.245N (25gf) at 0.45mm travel
 Current rating 0.5A

8YK-D40H-L53-CONI

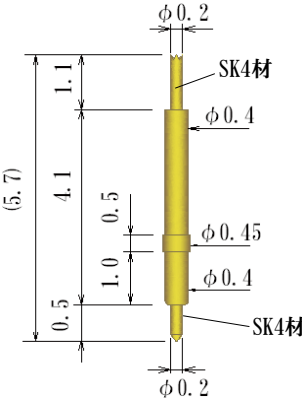
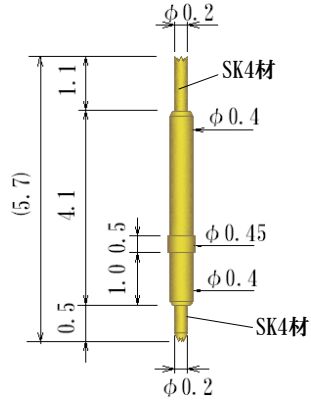
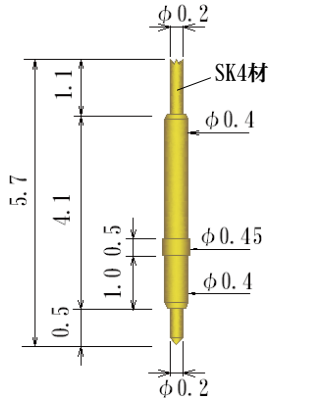
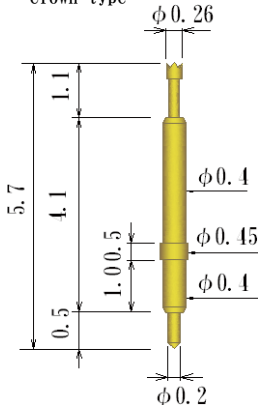
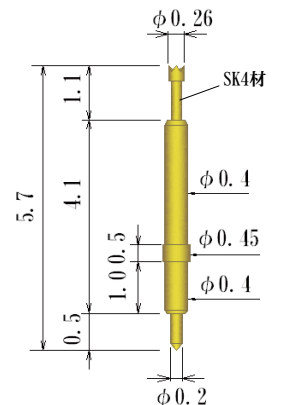
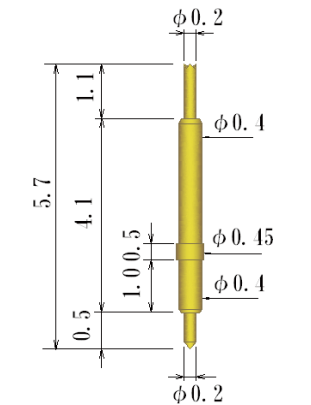
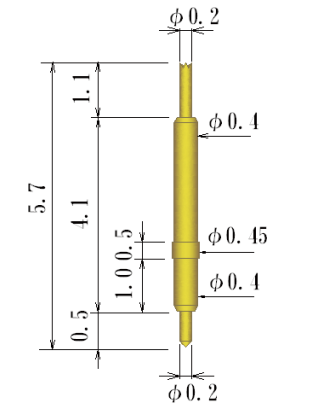


Full travel 1.1mm
 0.34N (35gf) at 0.9mm travel
 Current rating 0.5A

8YK-D40H-L57-CON-35G

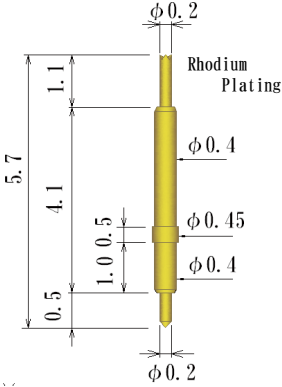
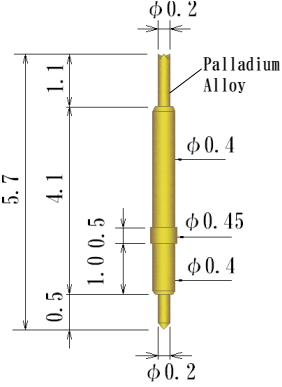
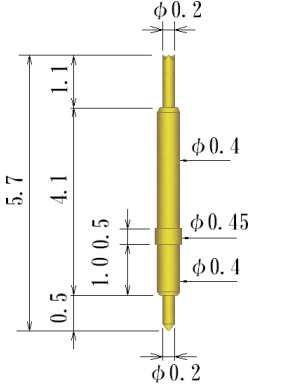
Double ended probepin 両端プローブピン
Outer Dia. $\phi 0.40 \sim 0.49\text{mm} / \phi 0.016'' \sim \phi 0.0193''$

Nihon Connect
TEL 03 (5706) 4360
FAX 03 (5706) 4363

<p>4 point crown type</p>  <p>Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-AU-A</p>	<p>4 point crown type</p>  <p>Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-AUI</p>	<p>4 point crown type</p>  <p>Full travel 1.1mm 0.26N (26gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-AUPI</p>	<p>Expanded 4 point crown type</p>  <p>Preload 0.04N (4gf) Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-BIGI</p>
<p>Expanded 4 point crown type</p>  <p>Preload 0.04N (4gf) Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-BIGI-SI-RH</p>	<p>4 point crown type</p>  <p>Plungers: BeCu</p> <p>Preload 0.04N (4gf) Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57I</p>	<p>4 point crown type</p>  <p>Full travel 1.1mm 0.26N (26gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57I-1</p>	

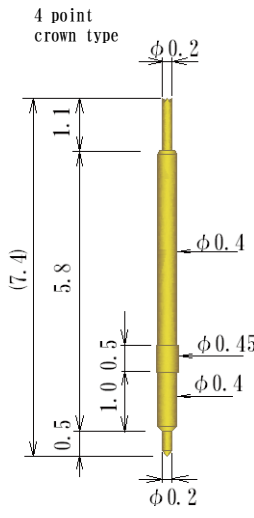
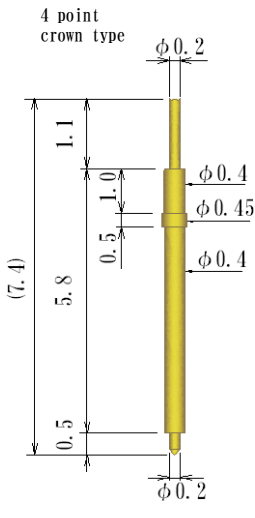
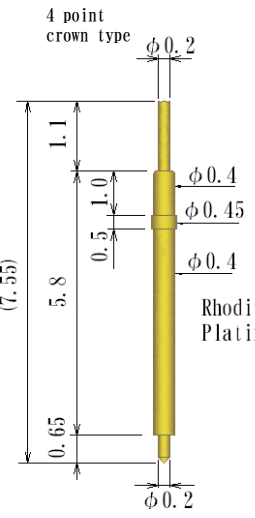
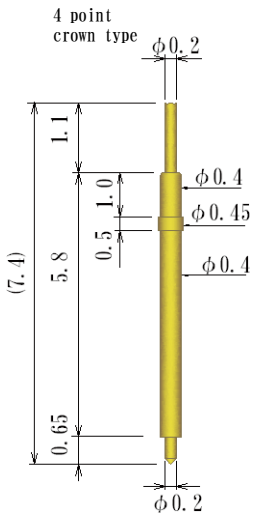
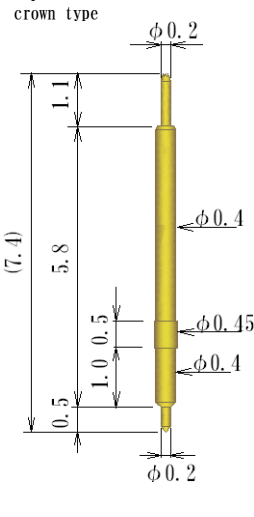
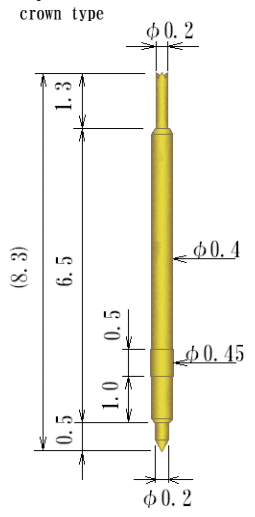
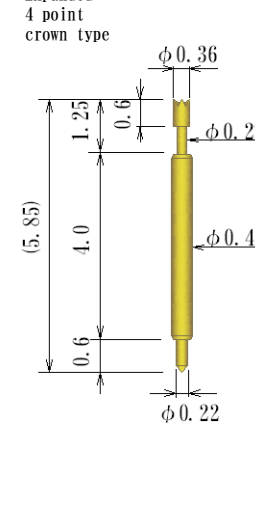
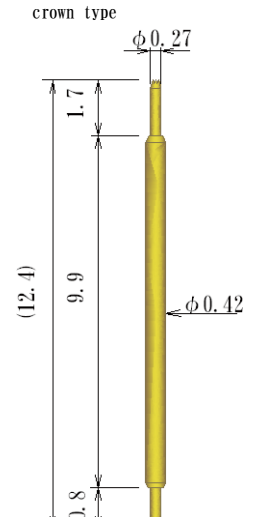
Double ended probepin 両端プローブピン
Outer Dia. $\phi 0.40 \sim 0.49\text{mm} / \phi 0.016'' \sim \phi 0.0193''$

Nihon Connect
TEL 03 (5706) 4360
FAX 03 (5706) 4363

<p>4 point crown type</p>  <p>Preload 0.04N (4gf) Full travel 1.1mm 0.228N (23.3gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-RHI</p>	<p>4 point crown type</p>  <p>Preload 0.04N (4gf) Full travel 1.1mm 0.26N (26.5gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-PD-PI</p>	<p>High Temperature spec</p> <p>4 point crown type</p>  <p>Preload 0.058N (5.9gf) Full travel 0.9mm 0.26N (26.5gf) at 0.7mm travel Current rating 0.5A</p> <p>8YK-D40H-L57-AUPSUSI</p>	

Double ended probepin 両端プローブピン
Outer Dia. $\phi 0.40 \sim 0.49\text{mm} / \phi 0.016'' \sim \phi 0.0193''$

Nihon Connect
 TEL 03 (5706) 4360
 FAX 03 (5706) 4363

 <p>4 point crown type</p> <p>Full travel 1.1mm 0.294N (29.9gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L74-AU30</p>	 <p>4 point crown type</p> <p>Preload 0.07N (7gf) Full travel 1.3mm 0.25N (25gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L74I</p>	 <p>4 point crown type</p> <p>Rhodium Plating</p> <p>Preload 0.07N (7gf) Full travel 1.3mm 0.25N (25gf) at 0.9mm travel Current rating 0.5A</p> <p>8YK-D40H-L74-RHI</p>	 <p>4 point crown type</p> <p>Preload 0.07N (7gf) Full travel 1.4mm 0.39N (40gf) at 0.95mm travel Current rating 0.5A</p> <p>8YK-D40H-L74-2</p>
 <p>4 point crown type</p> <p>Full travel 1.0mm 0.246N (25.1gf) at 0.55mm travel Current rating 0.5A</p> <p>8YK-D40H-L74TPC-HIJ ※非磁性仕様ピン</p>	 <p>4 point crown type</p> <p>Full travel 1.0mm 0.27N (27.5gf) at 0.55mm travel Current rating 0.5A</p> <p>8YK-D40H-L83-HIJ ※非磁性仕様ピン</p>	 <p>Expanded 4 point crown type</p> <p>Preload 0.12N (12.2gf) Full travel 0.8mm 0.343N (35gf) at 0.65mm travel Current rating 0.5A</p> <p>8YF42L58I</p>	 <p>4 point crown type</p> <p>Preload 0.107N (11gf) Full travel 2.34mm 0.392N (39.9gf) at 0.9mm travel Current rating 0.5A</p> <p>8YD42124L-WG-RDCRI</p>